
ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.

FOR APPROVAL - NOT FOR CONSTRUCTION

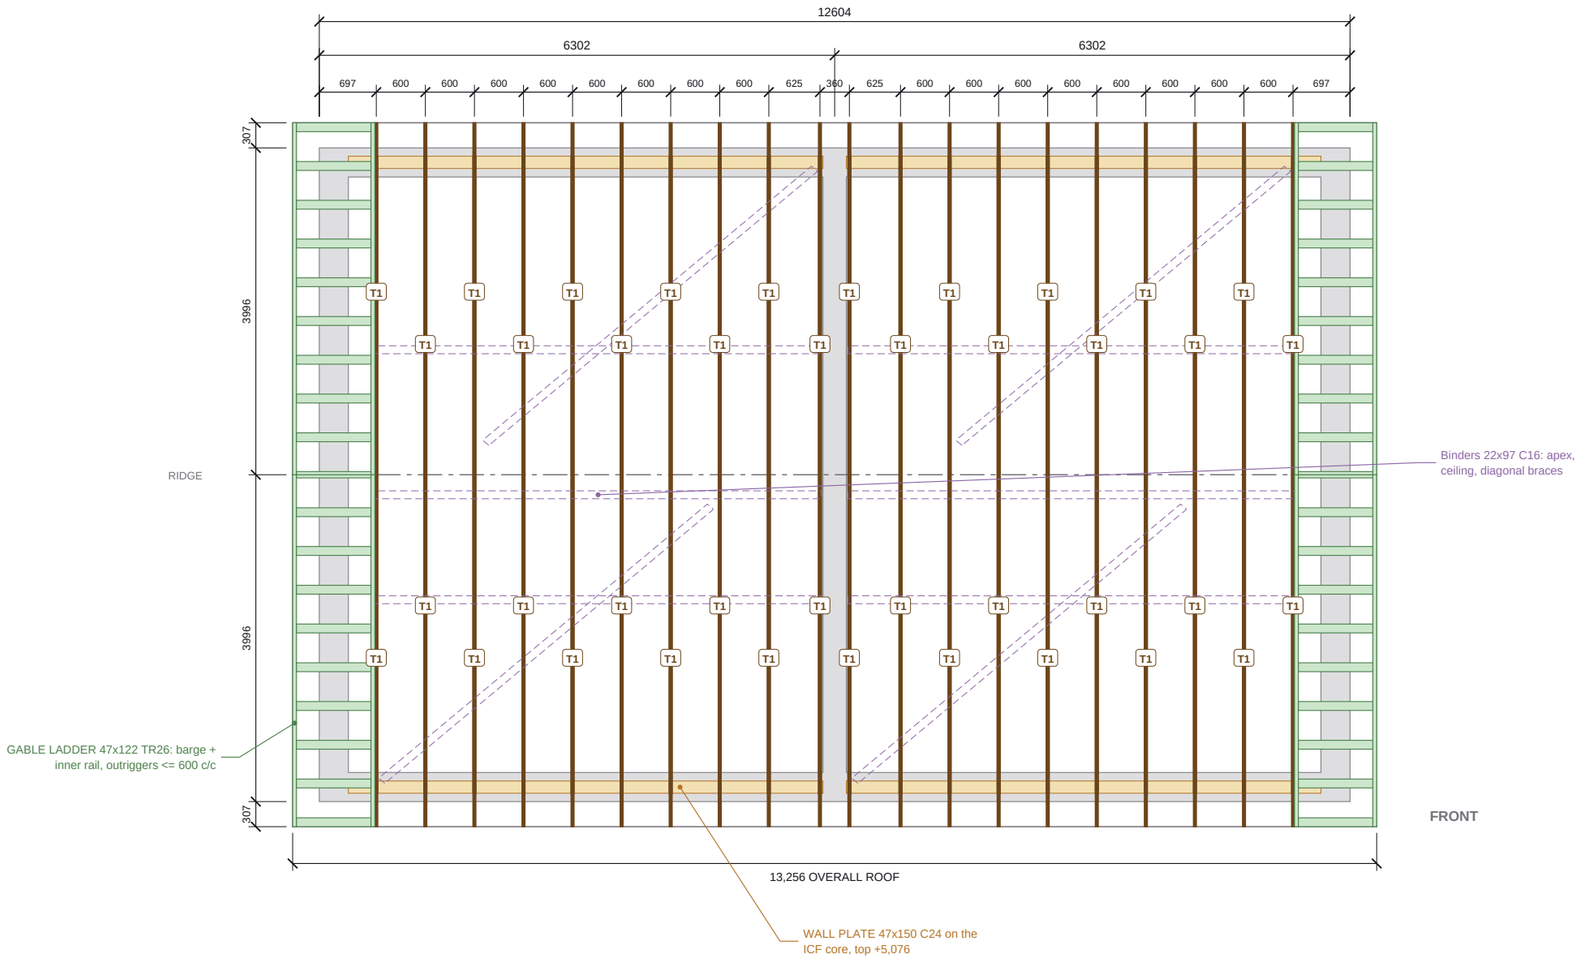

Trussed rafter (type T) | Gable ladder | Binder / diagonal brace

Wall plate on the ICF core | ICF walls (outline)

0 1 2 3 4 5m

ROOF STRUCTURE PLAN

Scale 1:75 @ A3 | Plan on the roof structure, tiles / battens / membrane / PV omitted

ROOF STRUCTURE SCHEDULES

TRUSS SCHEDULE

Type	Description	Bottom chord	Top chord	Qty
T1	Fink (W) 35 deg, duo-pitch	7,788	35x97 TR26	20
	Total trusses			**20**

Profiles, spans, rise and member sizes on ES26-020-ALW-RF-02.

LOOSE ROOF TIMBER

Item	Section	Length	Qty
Barge (gable ladder outer rail)	47x122 TR26	5,253	4
Binder / diagonal brace	22x97 C16	5,724	4
Binder / diagonal brace	22x97 C16	5,460	6
Gable ladder inner rail	47x122 TR26	5,253	4
Ladder outrigger	47x122 TR26	910	40
Wall plate on the ICF core	47x150 C24	5,804	4

ROOF METALWORK

Item	Qty
Gable restraint strap 30 x 5 (HES)	12
Truss clip to plate (TCP38)	40

GABLE LADDERS

Item	mm
Gable left (x 0) + right (x 12,604): 2 No. ladders each, one per slope	
Section, on edge (ladder depth 122)	47x122 TR26
Overall width, barge outer to rail inner face	1,005
Projection beyond the outer ICF face	326
Back span inside the outer ICF face	679
About the wall centre (177.8 in): out / in	504 / 501
Barge + inner rail (per gable)	4 No. x 5,253
Outriggers (per gable)	20 No. x 910 @ 578 on slope

Restraint straps <= 2 m c/c into the ICF core. Gable ICF raked to the ladder underside.

NOTES

1. Roof trusses, gable ladders, binders and metalwork as modelled (TLS roof framer) - a DESIGN ASSUMPTION for coordination. The truss manufacturer designs the trusses and the bracing to BS EN 1995-1-1 / BS 5268-3 and confirms the spacing, member sizes and metalwork.
2. 2 roof bays (one per dwelling, set out from each gable, party edge on the party wall core faces): 20 No. Fink trusses at 600 c/c (closing bay 625), 35 deg, on 47 x 150 C24 wall plates bedded on the ICF core of the eaves walls, plate top +5,076 above GF FFL (eaves walls flat at +5,029.2).
3. Gable ends: gable ladders 47x122 TR26 (Beech standard: barge + inner rail + outriggers <= 600 c/c), restraint straps <= 2 m c/c. Party wall carried up to the underside of the tiles (fire stop by others).
4. Truss clips TCP38 at every bearing. All levels above GF FFL. Dimensions in mm.
5. Alwen 4P2B Type A (semi). Datum 0 = GF FFL. Architect: Beech Developments - BD0165-ALW rev A (JHG 28/08/26).

REVISIONS

REV	DATE	DESCRIPTION
P01	29.10.26	Approval issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments (NW) Ltd	Maes Y Felin, Glan Conwy - Alwen

DRAWING TITLE

ALWEN - ROOF TRUSS LAYOUT

Fink trusses, gable ladders, binders, wall plates

SCALE	SIZE	DATE
AS SHOWN	A3	29.10.26
DRAWN	**CHECKED**	**APPROVED**
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	ES26-020-ALW-RF-01	P01

Do not scale. All dimensions in mm. Check all dimensions on site.