
ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.

FOR APPROVAL - NOT FOR CONSTRUCTION

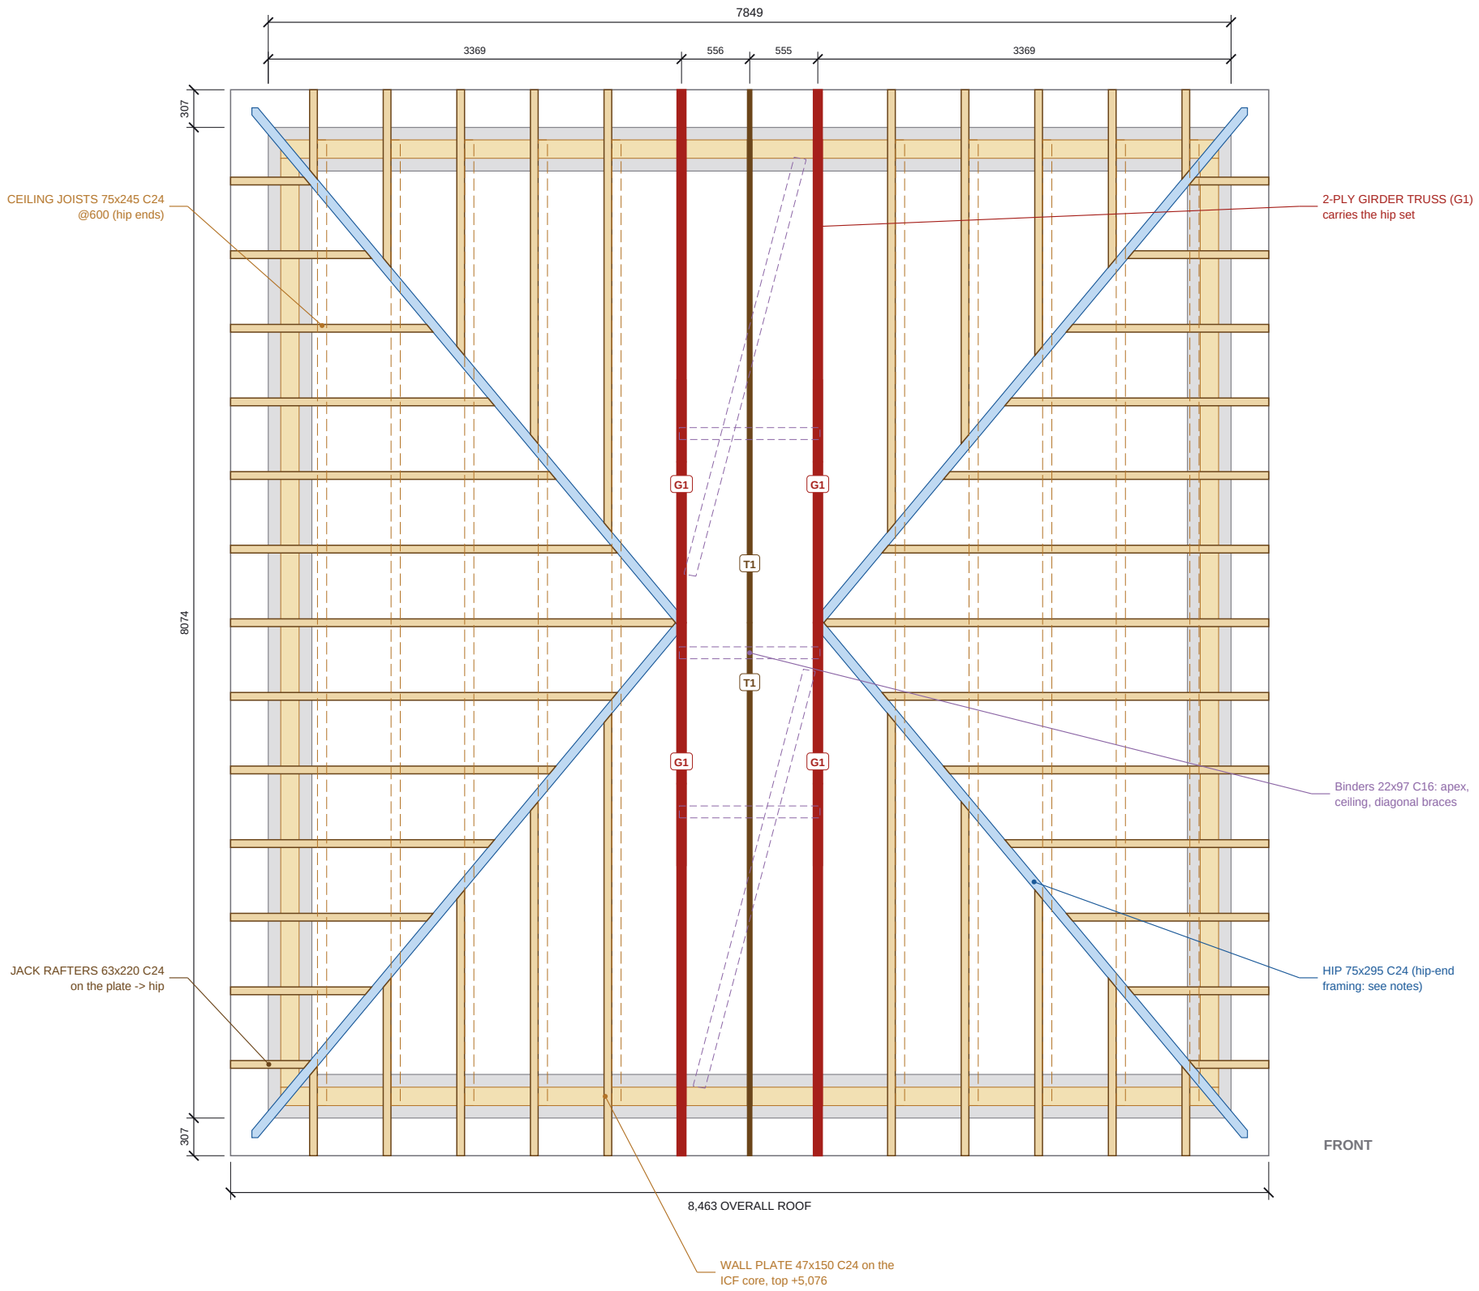

ROOF STRUCTURE PLAN

Scale 1:50 @ A3 | Plan on the roof structure, tiles / battens / membrane / PV omitted

Girder truss (type G)
Crown / jack rafter
Wall plate on the ICF core
Trussed rafter (type T)
Ceiling joist (hip end)
ICF walls (outline)
Hip
Binder / diagonal brace

0 1 2 3

ROOF STRUCTURE SCHEDULES

TRUSS SCHEDULE

Type	Description	Bottom chord	Top chord	Qty
T1	Fink (W) 35 deg, duo-pitch	7,871	35x97 TR26	1
G1	2-ply girder (Fink) 35 deg	7,871	2/35x97 TR26	2
	Total trusses			**3**

Profiles, spans, rise and member sizes on ES26-020-OGW-RF-02.

LOOSE ROOF TIMBER

Item	Section	Length	Qty
Binder / diagonal brace	22x97 C16	1,147-4,229	5
Ceiling joist (hip end)	75x245 C24	7,871	10
Crown rafter	63x220 C24	4,798	2
Hip	75x295 C24	6,424	4
Jack rafter (hip end)	63x220 C24	877-4,425	44
Wall plate on the ICF core	47x150 C24	7,646	2
Wall plate on the ICF core	47x150 C24	7,571	2

ROOF METALWORK

Item	Qty
Truss clip to plate (TCP38)	2
Girder clip to plate (TCP50)	4
Girder hanger, hip head onto the girder (THA75)	4

NOTES

1. Hipped roof (design assumption, TLS roof framer): two 2-ply girder trusses at x 3,369 / 4,480 (1,111 apart) with 1 No. Fink truss between them, front / rear slopes 35 deg, hip ends 40 deg (as measured on the elevations - design assumption), on 47 x 150 C24 wall plates bedded on the ICF core all round, plate top +5,076 above GF FFL.
2. Hip ends: the model frames each hip end loose - hips 75x295 C24, crown and jack rafters 63x220 C24 seated on the plate and hung on the hips, ceiling joists 75x245 C24 @600 front to rear - as a stand-in for the truss manufacturer's hip set (girder + mono jack trusses in shoes). The manufacturer designs the hip set, girders, shoes and bracing to BS EN 1995-1-1.
3. Truss clips at every bearing, girder hangers at the hip heads. Binders and diagonal braces as shown. All levels above GF FFL. Dimensions in mm.
4. Ogwen 5P4B (detached). Datum 0 = GF FFL. Architect: Beech Developments - BD0154-OGW rev A (JHG 28/10/26).

REVISIONS

REV	DATE	DESCRIPTION
P01	29.10.26	Approval issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments (NW) Ltd	Maes Y Felin, Glan Conwy - Ogwen

DRAWING TITLE

OGWEN - ROOF TRUSS LAYOUT

Girder trusses, Fink truss, hip ends (hips, crowns, jacks, ceiling joists), binders, wall plates

SCALE	SIZE	DATE
AS SHOWN	A3	29.10.26
DRAWN: TS	CHECKED	APPROVED

STATUS	DRAWING No.	REV
FOR APPROVAL	ES26-020-OGW-RF-01	P01

Do not scale. All dimensions in mm. Check all dimensions on site.