

ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.

FOR APPROVAL - NOT FOR CONSTRUCTION

T1 FINK (W) TRUSS - 1 No. (1:75)

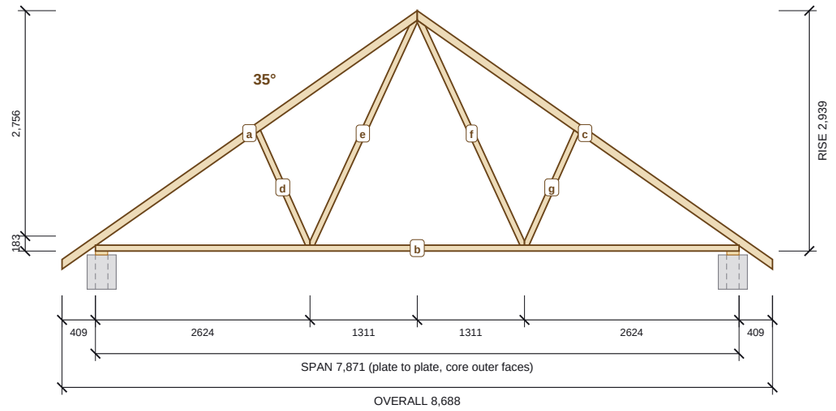

G1 2-PLY GIRDER (FINK) - 2 No. (1:75)

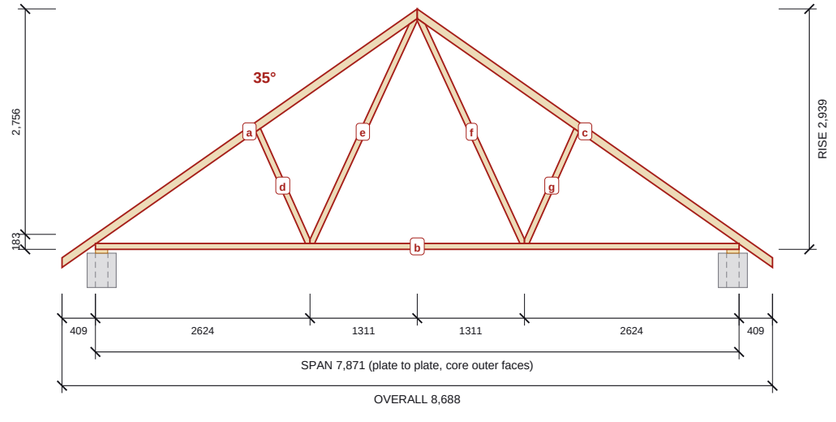

TRUSS TYPES

T1 FINK - 1 NO.

	Member	Section	Length
a	top chord	35x97 TR26	5,303
b	bottom chord	35x72 TR26	7,871
c	top chord	35x97 TR26	5,303
d	web	35x72 TR26	1,606
e	web	35x72 TR26	3,131
f	web	35x72 TR26	3,131
g	web	35x72 TR26	1,606

Span 7,871, overall 8,688, pitch 35 deg, rise 2,939, heel 183 (plate top to top of top chord over the core outer face), overhang 409 past the core face. Plate +5,076, apex +8,015.

G1 GIRDER - 2 NO.

	Member	Section	Length
a	top chord	2/35x97 TR26	5,303
b	bottom chord	2/35x72 TR26	7,871
c	top chord	2/35x97 TR26	5,303
d	web	2/35x72 TR26	1,606
e	web	2/35x72 TR26	3,131
f	web	2/35x72 TR26	3,131
g	web	2/35x72 TR26	1,606

Span 7,871, overall 8,688, pitch 35 deg, rise 2,939, heel 183 (plate top to top of top chord over the core outer face), overhang 409 past the core face. Plate +5,076, apex +8,015.

HIP-END FRAMING (AS MODELLED)

Item	Section	Length	Qty	Run m
Hip (one per corner)	75x295 C24	6,424	4	25.7
Crown rafter (one per hip end)	63x220 C24	4,798	2	9.6
Jack rafter (hip ends + front / rear slopes)	63x220 C24	877-4,425	44	113.7
Ceiling joist (hip ends)	75x245 C24	7,871	10	78.7

Hip ends from each end wall to the girders at x 3,369 / 4,480 (3,369 / 3,369 deep). Manufacturer to design as girder + mono jack trusses in shoes.

NOTES

1. DESIGN ASSUMPTION for coordination: the trussed rafter manufacturer designs the final trusses (members, joints, nail plates, bracing) to BS EN 1995-1-1 for the stated loads and confirms all sizes before manufacture.
2. Profiles drawn to scale from the approval model member geometry: TR26 strength class, 35 wide members, nail-plated joints. Member marks a, b, c ... refer to the member tables.
3. Design brief (ASSUMED, truss supplier / engineer to confirm): concrete interlocking tiles on battens and breathable membrane + solar PV (0.73 kN/m2 over the whole roof), plasterboard ceiling, loft not habitable; Glan Conwy LL28, altitude ~25 m, snow zone 2, vb 24 m/s, exposed (estuary).
4. G = 2-ply girder truss at each end of the hip set, carrying the hip-end framing. The model frames the hip ends loose (hips, crowns, jacks); the manufacturer replaces them with mono jack trusses in girder shoes - the table gives the hip-end extent and lengths.
5. Trusses bear on 47 x 150 C24 wall plates on the ICF core of the eaves walls (plate top +5,076).
6. Binders, bracing, clips and hangers are listed on ES26-020-OGW-RF-01.
7. Ogwen 5P4B (detached). Datum 0 = GF FFL. Architect: Beech Developments - BD0154-OGW rev A (JHG 28/10/26).

REVISIONS

REV	DATE	DESCRIPTION
P01	29.10.26	Approval issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments (NW) Ltd	Maes Y Felin, Glan Conwy - Ogwen

DRAWING TITLE

OGWEN - TRUSS PROFILES

Trussed rafter profiles (design assumption)

SCALE	SIZE	DATE
AS SHOWN	A3	29.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	ES26-020-OGW-RF-02	P01

Do not scale. All dimensions in mm. Check all dimensions on site.