
**ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.**

**FOR APPROVAL - NOT FOR CONSTRUCTION**

## SECTION DETAIL - FIRST FLOOR AT THE ICF WALL

1:5 - over Beech section A-A (BD0165-ALW rev A)

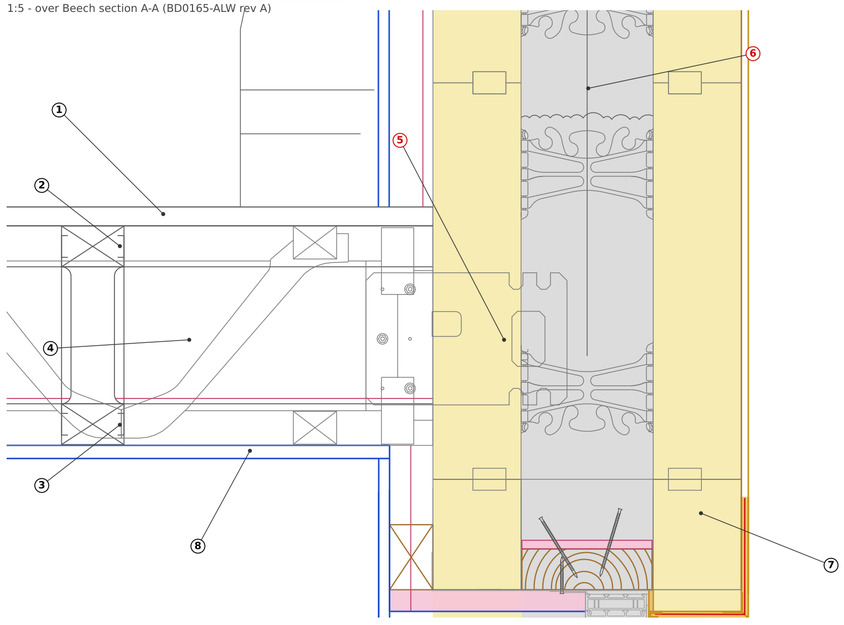


**1** 22 Egger Protect P5 deck, glued and screwed to the joists

**2** 253 metal-web joist @ 600 - C24 TOP flange

**3** C24 BOTTOM flange

**4** Galvanised steel web

**5** Joists TOP-HUNG on a cut-down Strong-Tie ICF ledger connector cast into the core (ledger by the engineer, hangers by the joist supplier)

**6** 6in XR35 runs straight past the floor - the core is poured full height, no cold joint at the floor

**7** Dryvit ICF 500 render system on the EPS

**8** GF ceiling plasterboard (as Beech)

### NOTES

1. FF floor: 253 metal-web joists @ 600 with C24 flanges and galvanised steel webs, 22 Egger Protect P5 deck. DESIGN ASSUMPTION - joist design by the joist supplier.
2. Joists top-hung on cut-down Strong-Tie ICF ledger connectors cast into the core; the ledger and its fixings are designed by the engineer.
3. Floor layout and joist profiles: FL-01 / FL-02.
4. Powys (detached), plot 14, building B05. Datum 0 = GF FFL. Architect: Beech Developments - BD0154-POW rev A (JHG 26/10/26).

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| P01 | 29.10.26 | Approval issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| Beech Developments (NW) Ltd | Maes Y Felin, Glan Conwy - Powys |

DRAWING TITLE

**POWYS - FIRST FLOOR DETAIL - TOP-HUNG JOISTS AT THE ICF**

| SCALE | SIZE | DATE |
|---|---|---|
| 1:5 @ A2 | A2 | 29.10.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| FOR APPROVAL | ES26-020-POW-DT-04 | P01 |

Do not scale. All dimensions in millimetres. levels in metres from GF FFL. Check all dimensions on site.