
ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.

FOR APPROVAL - NOT FOR CONSTRUCTION

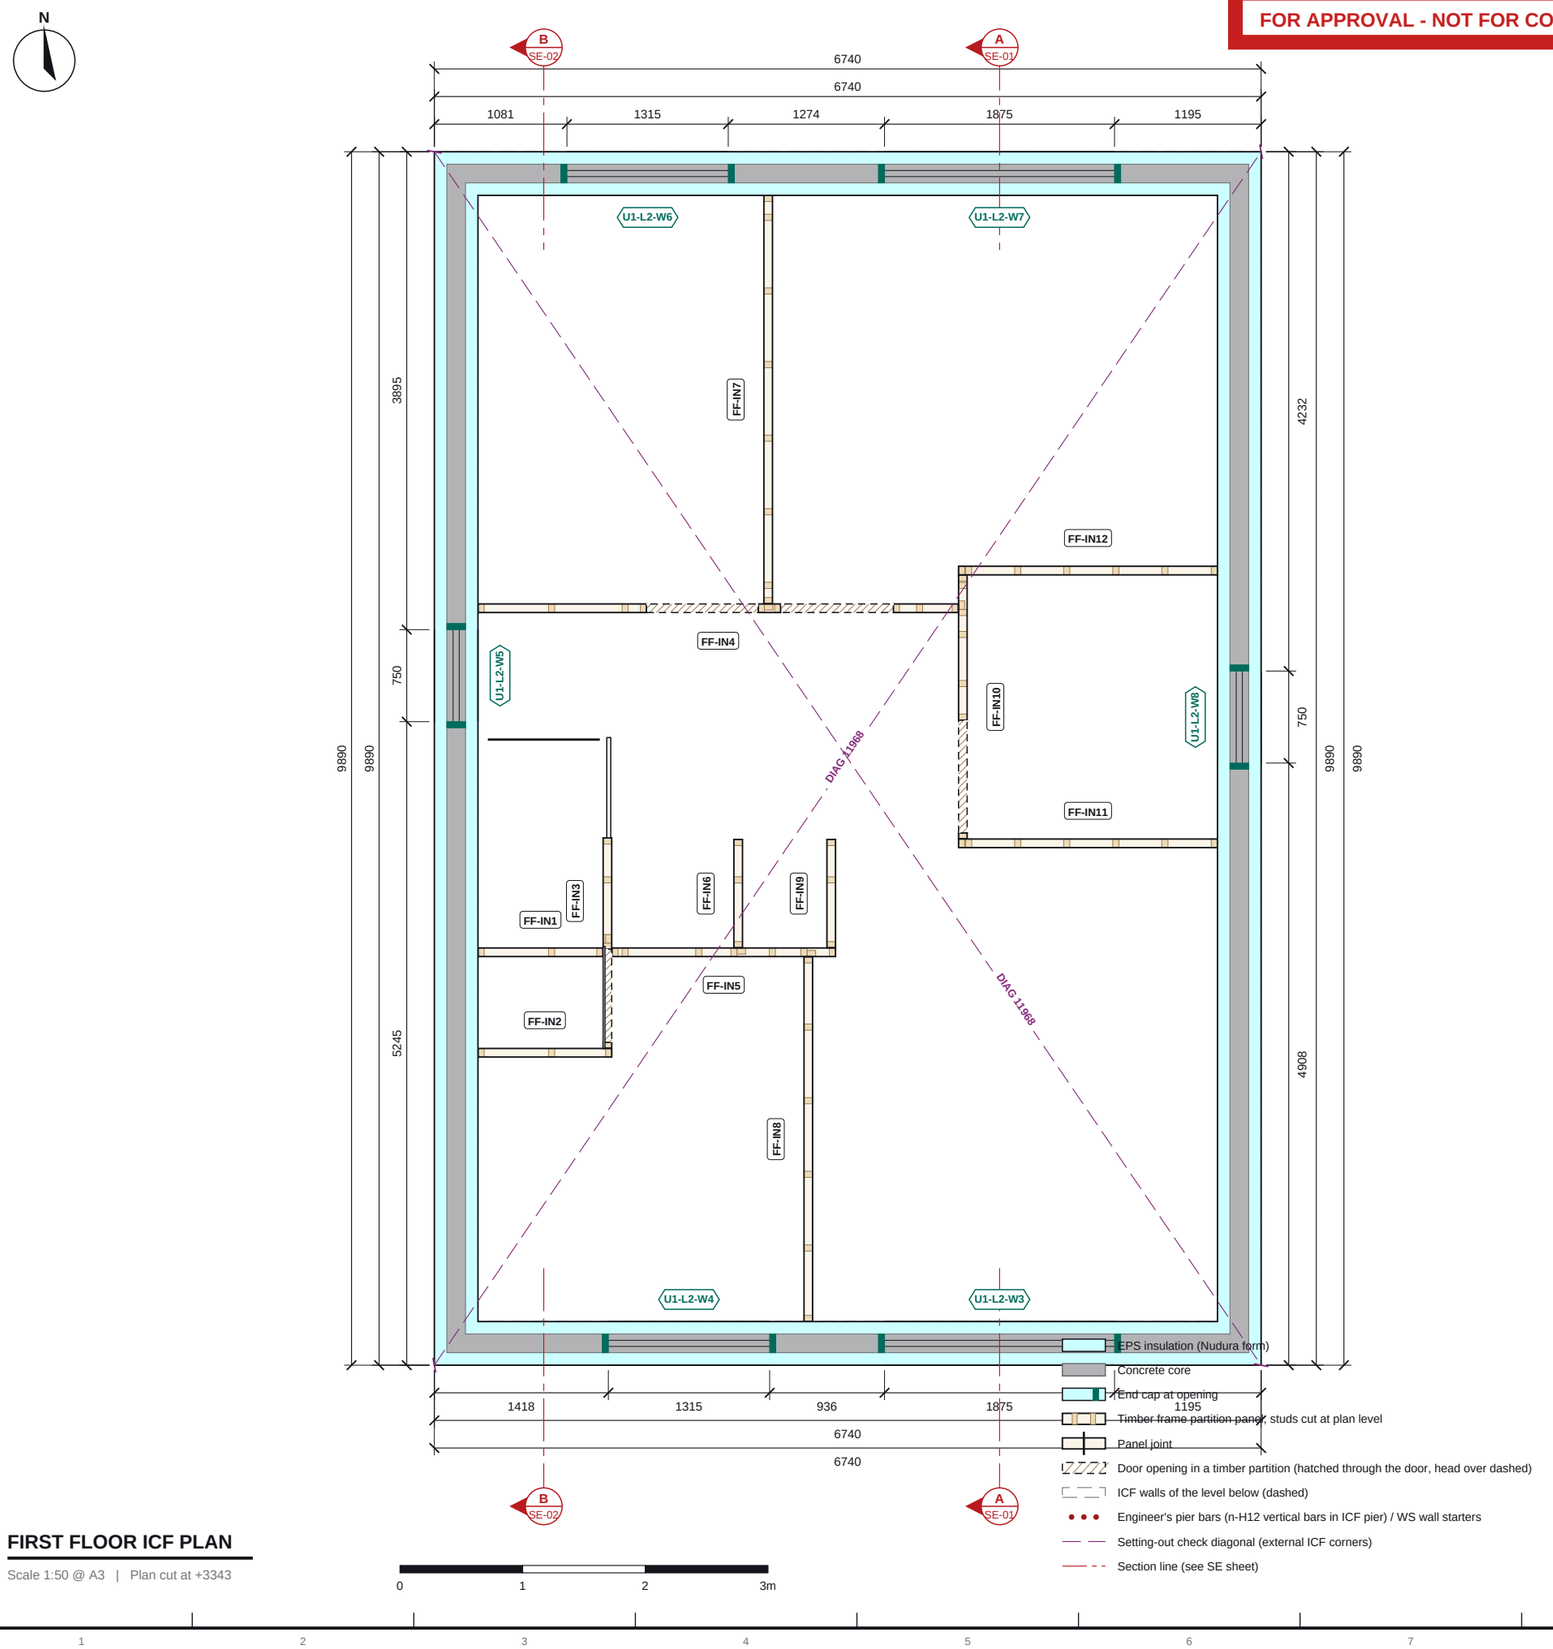

FIRST FLOOR ICF PLAN

Scale 1:50 @ A3 | Plan cut at +3343

FIRST FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
U1-L2-W4	1315	1244	+3480	+4724	-
U1-L2-W3	1875	1244	+3480	+4724	-
U1-L2-W6	1315	1244	+3480	+4724	-
U1-L2-W7	1875	1244	+3480	+4724	-
U1-L2-W5	750	1092	+3633	+4724	-
U1-L2-W8	750	1092	+3633	+4724	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. Nudura 6in XR35 external walls; no lintels or end caps - heads and jambs closed with 47 x 150 timber closers, the core spans the head (rebar by the engineer).
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Powys (detached), plot 14, building B05. Datum 0 = GF FFL. Architect: Beech Developments - BD0154-POW rev A (JHG 26/10/26).

REVISIONS

REV	DATE	DESCRIPTION
P01	29.10.26	Approval issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments (NW) Ltd	Maes Y Felin, Glan Conwy - Powys

DRAWING TITLE

POWYS - FIRST FLOOR ICF AND PARTITIONS

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:50	A3	29.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	ES26-020-POW-GA-03	P01

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.