
ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.

FOR APPROVAL - NOT FOR CONSTRUCTION

GA PLAN DETAIL - WINDOW JAMB (W03, both jambs handed)

1:5 - over Beech's CAD (BD0165-ALW rev A)

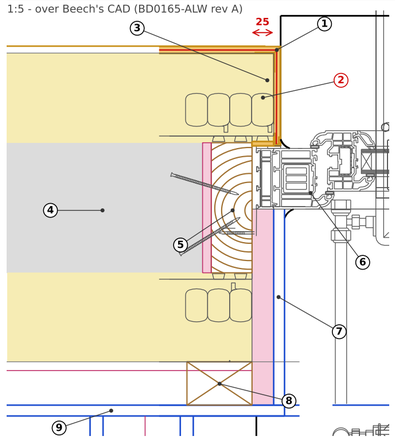


1. Dryvit ICF 500 render, returned into the reveal
2. 6in XR35 EXTERNAL panel returns 25 past the core reveal = 25 OVERFLY
3. membrane / tape (as Beech)
4. concrete core 152.4
5. 47 x 150 TIMBER CLOSER + 10 insulation - no end caps
6. PVCu frame + sash (Beech profile)
7. plasterboard + insulation returned to the frame
8. 50 x 75 timber framing at the opening
9. 50 service zone + 12.5 plasterboard

25 mm EXTERNAL OVERFLY - every window and door, every plot.
JAMBS + HEAD: core closed by a 47 x 150 timber closer + 10 insulation (no Nudura end caps, no lintels - the core spans the head, rebar by the engineer). The XR35 external panel is cut 25 short into the opening and rendered on its return; the frame tucks behind it.
CILLS: ICF + core cut flat 25 below the cill line, no closer, no overfly. DOOR THRESHOLDS: no overfly.
Frame, cill and board profiles, fixings and tapes by the window supplier / Beech.

SECTION DETAIL - WINDOW HEAD (FFL + 2133.6)


1:5 - over Beech's CAD (BD0165-ALW rev A)

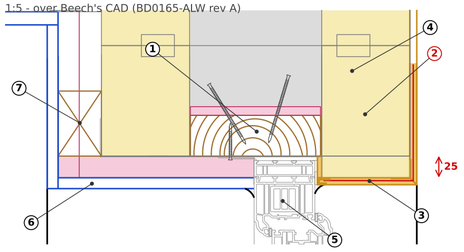

1. 47 x 150 TIMBER CLOSER = head (FFL + 2133.6) + 10 insulation; no lintel, core spans (rebar by engineer)
2. 6in XR35 EXTERNAL panel stops 25 below the head = 25 OVERFLY
3. render returned on the EPS soffit
4. membrane / tape (as Beech)
5. PVCu frame (Beech profile) tucked up behind the overfly
6. plasterboard + insulation soffit returned to the frame
7. 50 x 75 timber framing at the head

SECTION DETAIL - WINDOW CILL (FFL + 1066.8 shown)

1:5 - over Beech's CAD (BD0165-ALW rev A)

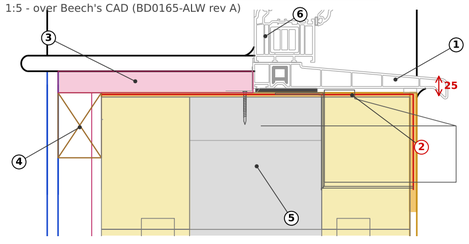

1. PVCu cill with drip, past the render
2. ICF + core cut FLAT 25 below the cill line, render over; NO overfly, NO closer
3. 25 insulated window board
4. 50 x 75 timber framing under the board
5. 6in XR35: 101.6 EPS / 152.4 core / 101.6 EPS
6. PVCu frame + sash on the cill (Beech profile)

NOTES

1. Views drawn over Beech's own CAD (BD0165-ALW rev A, section A-A + GF plan) at true 1:5; typical for every window and door of every house type.
2. Red = BuildEase design. Yellow = EPS, grey = concrete core.
3. 25 mm external overfly at jambs and heads; none at cills or door thresholds.
4. Window frames, cills, boards, tapes and fixings by the window supplier / Beech.
5. 3B4P (semi pair), plots 16-17, building B07. Datum 0 = GF FFL. Architect: Beech Developments - BD0154-3B4P rev A (JHG 26/10/26).

REVISIONS

REV	DATE	DESCRIPTION
P01	03.11.26	Approval issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments (NW) Ltd	Maes Y Felin, Glan Conwy - 3B4P

DRAWING TITLE
3B4P - OPENING DETAILS - JAMB, HEAD AND CILL

SCALE	SIZE	DATE
1:5 @ A2	A2	03.11.26

DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	ES26-020-3B4P-DT-01	P01

Do not scale. All dimensions in millimetres. levels in metres from GF FFL. Check all dimensions on site.