
ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.

FOR APPROVAL - NOT FOR CONSTRUCTION

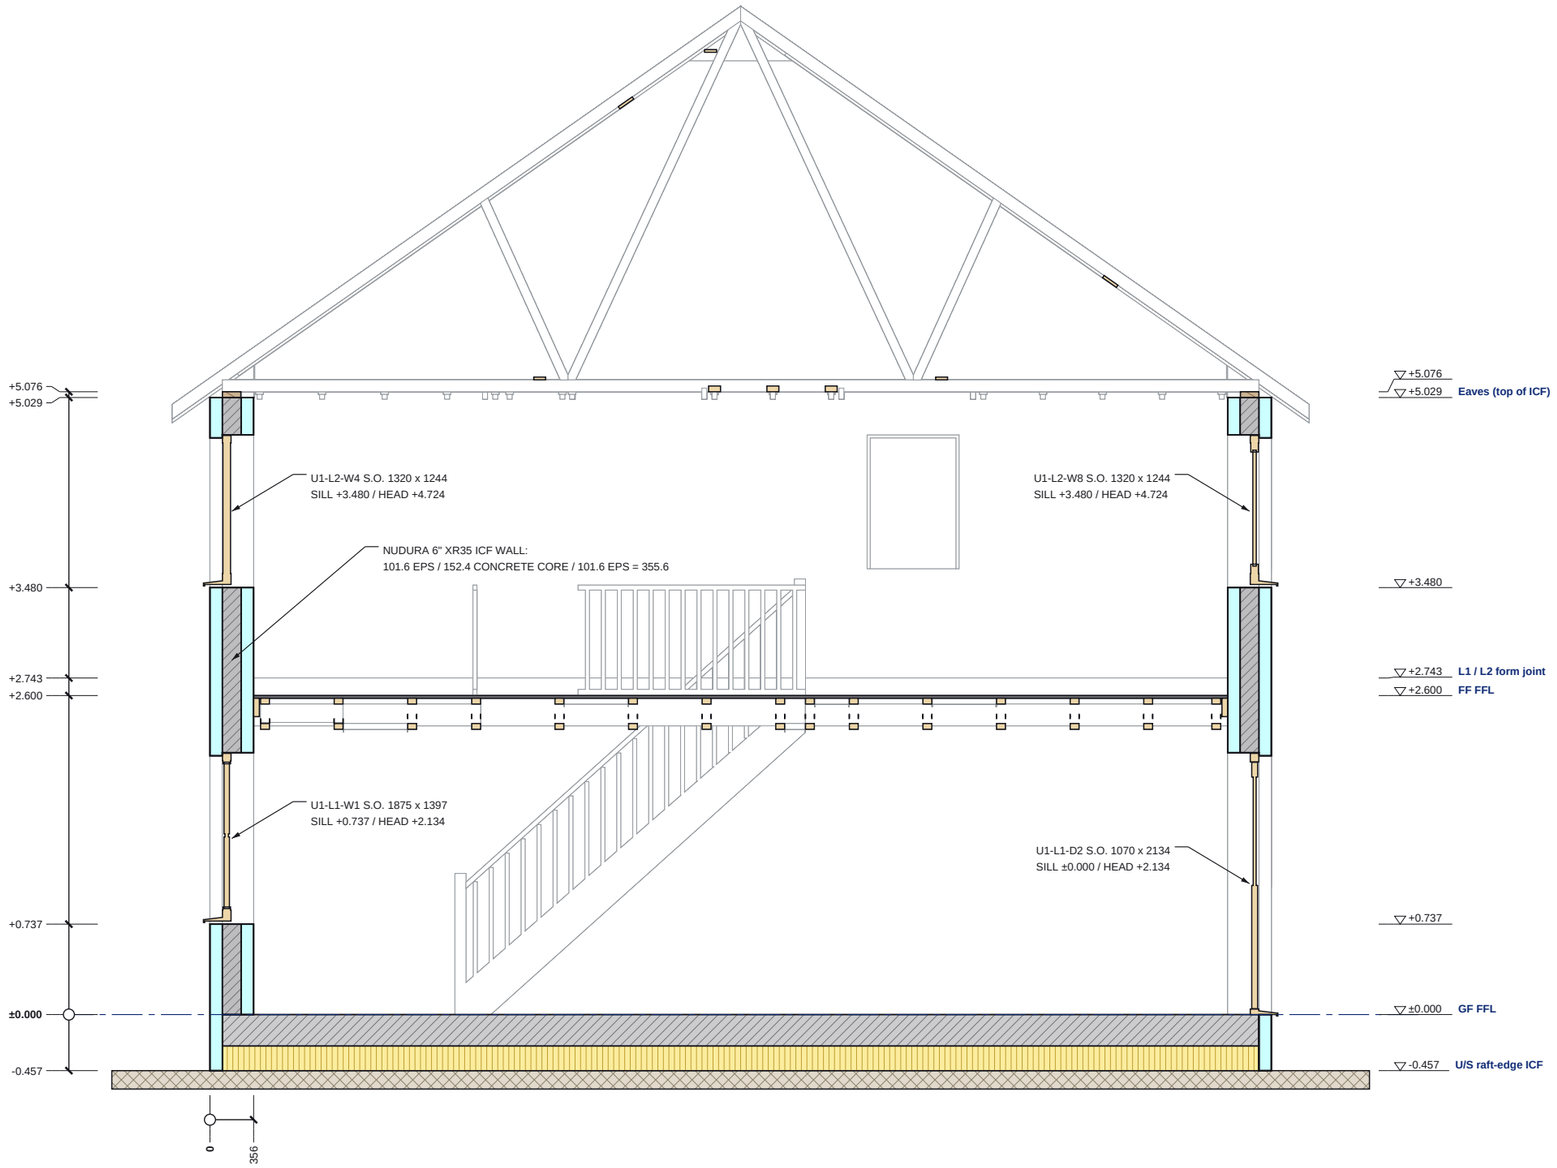

SECTION A-A

Scale 1:50 @ A3 | Looking west; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Insulation (PIR)
Hardcore (Type 3 MOT)
Floor deck
Timber (cut)
Beyond the cut (line work)

0 1 2m


Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION A-A SCHEDULES

LEVELS ON THIS SECTION

Level	FFL
U/S raft-edge ICF	-0.457
GF FFL	±0.000
top of ICF W04	+0.737
FF FFL	+2.600
L1 / L2 form joint	+2.743
top of ICF W04	+3.480
Eaves (top of ICF)	+5.029
top of roof build-up	+5.076

SECTION KEY

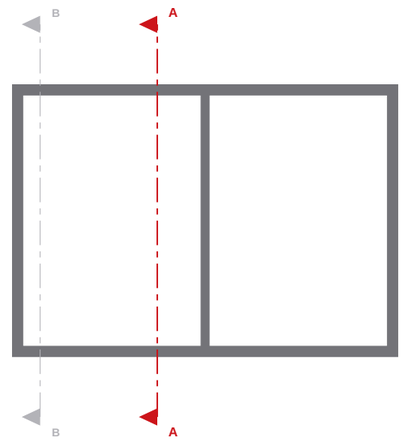

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. Nudura 6in XR35 external walls, 6in Standard party wall; no lintels or end caps - heads and jambs closed with 47 x 150 timber closers, the core spans the head (rebar by the engineer).
4. Steel marks, BOS / TOS: rev -. See ES26-020-3B4P-GA-01 / EL-01 / EL-02 in the approval drawings pack.
5. 3B4P (semi pair), plots 16-17, building B07. Datum 0 = GF FFL. Architect: Beech Developments - BD0154-3B4P rev A (JHG 26/10/26).

REVISIONS

REV	DATE	DESCRIPTION
P01	03.11.26	Approval issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments (NW) Ltd	Maes Y Felin, Glan Conwy - 3B4P

DRAWING TITLE
SECTION A-A
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:50	A3	03.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	ES26-020-3B4P-SE-01	P01