

ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.

FOR APPROVAL - NOT FOR CONSTRUCTION

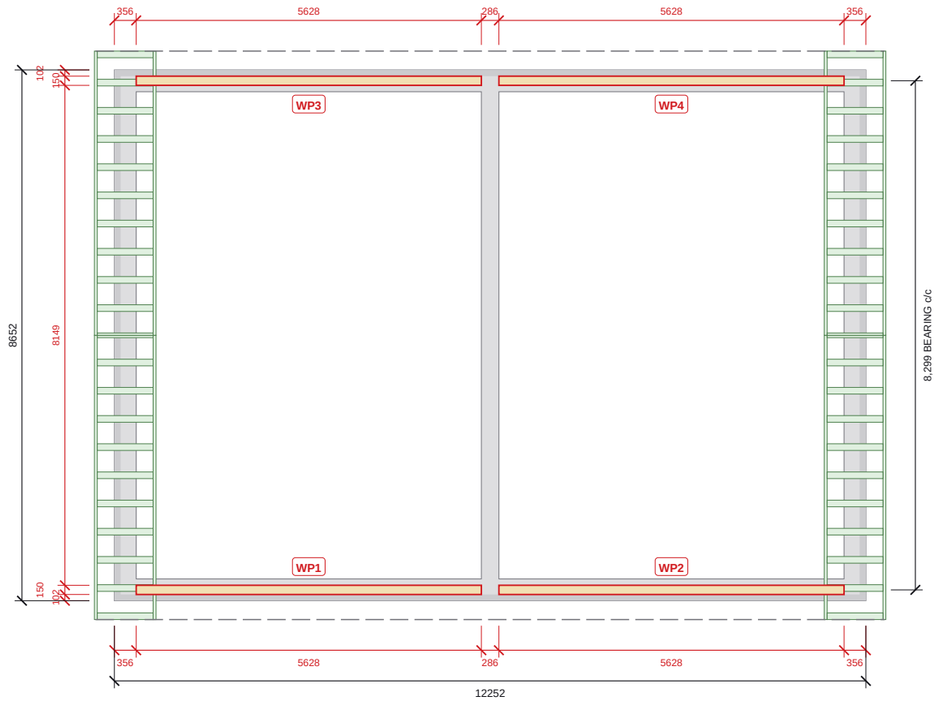

WALL PLATE SETTING-OUT PLAN

Scale 1:100 | dims from the OUTER ICF face; dashed = eaves line

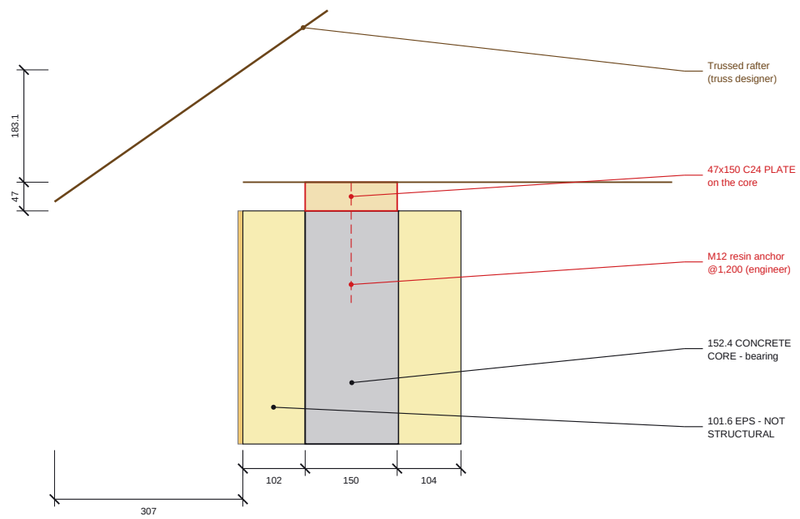

EAVES SECTION AT THE PLATE

Scale 1:10 | front / rear walls (see DT-03)

WALL PLATE SCHEDULE

47 X 150 C24 TREATED, TOP +5,076

Plate	Length	Runs	On the core
WP1	5,628	x 356 - 5,983	y 101.6 - 251.6
WP2	5,628	x 6,269 - 11,897	y 101.6 - 251.6
WP3	5,628	x 356 - 5,983	y 8400.9 - 8550.9
WP4	5,628	x 6,269 - 11,897	y 8400.9 - 8550.9

x from the left outer ICF face, y from the front outer ICF face.

BEARING

Item	mm
Plate centre from outer face	176.6
Span between plate centres (front-rear)	8,299
Outer ICF face to face	8,652
Heel at the outer face	183.1
Overhang beyond the outer face	307

GABLE LADDERS

Item	mm
Gable left (x 0) + right (x 12,252): 2 No. ladders each, one per slope	
Section, on edge (ladder depth 122)	47x122 TR26
Overall width, barge outer to rail inner face	1,005
Projection beyond the outer ICF face	326
Back span inside the outer ICF face	679
About the wall centre (177.8 in): out / in	504 / 501
Barge + inner rail (per gable)	4 No. x 5,656
Outriggers (per gable)	22 No. x 910 @ 561 on slope

Restraint straps <= 2 m c/c into the ICF core. Gable ICF raked to the ladder underside.

NOTES

1. FOR THE TRUSS DESIGNER: the external walls are Nudura 6in XR35 insulated concrete formwork - 101.6 EPS foam / 152.4 reinforced concrete core / 101.6 EPS foam (355.6 overall), rendered outside (Dryvit ICF 500), lined inside.
2. The EPS is formwork and insulation only - it is NOT STRUCTURAL and must carry no load. The trusses bear on the 47 x 150 C24 treated WALL PLATE, which sits on the CONCRETE CORE ONLY: 101.6 to 251.6 in from the outer ICF face.
3. Core top +5,029 above GF FFL; plate top (truss bearing) +5,076. All dimensions are from the OUTER face of the ICF (the render adds 8).
4. Plate fixing: M12 resin anchors into the core @ 1,200 max, 300 from each end and each side of every joint - DESIGN ASSUMPTION, engineer to confirm. Truss clips to the plate and restraint straps by the truss designer.
5. Heel 183.1 (plate top to rafter top at the outer ICF face); eaves overhang 307 beyond the outer ICF face (tiles 382). Pitch 35 deg.
6. GABLE ROOF: plates on the front and rear eaves walls only, stopping at the gable inner faces; the gables are raked ICF under 47 x 122 TR26 gable ladders (no plate on the gables).
7. PARTY WALL (6in Standard, 285.8): the plates stop either side of it; the party wall rises to the roof line between the two roofs - no trusses bear on it.
8. 3B4P (semi pair), plots 16-17, building B07. Datum 0 = GF FFL. Architect: Beech Developments - BD0154-3B4P rev A (JHG 26/10/26).

REVISIONS

REV	DATE	DESCRIPTION
P01	03.11.26	Approval issue

Nudura™ BuildEase

CLIENT	PROJECT
Beech Developments (NW) Ltd	Maes Y Felin, Glan Conwy - 3B4P

DRAWING TITLE

3B4P - WALL PLATE SETTING-OUT FOR THE TRUSS DESIGNER

Wall plates on the ICF core - setting-out from the outer ICF face (design assumption)

SCALE	SIZE	DATE
AS SHOWN	A3	03.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	ES26-020-3B4P-RF-00	P01

Do not scale. All dimensions in mm. Check all dimensions on site.