**ICF PACKAGE: Nudura ICF formwork and accessories are our supply. Raft and foundations AS PER THE ARCHITECTURAL DRAWINGS; joist ledgers by the engineer. Floors, stairs, partitions, roof and joinery are drawn as DESIGN ASSUMPTIONS for coordination - check by the relevant professional.**

**FOR APPROVAL - NOT FOR CONSTRUCTION**

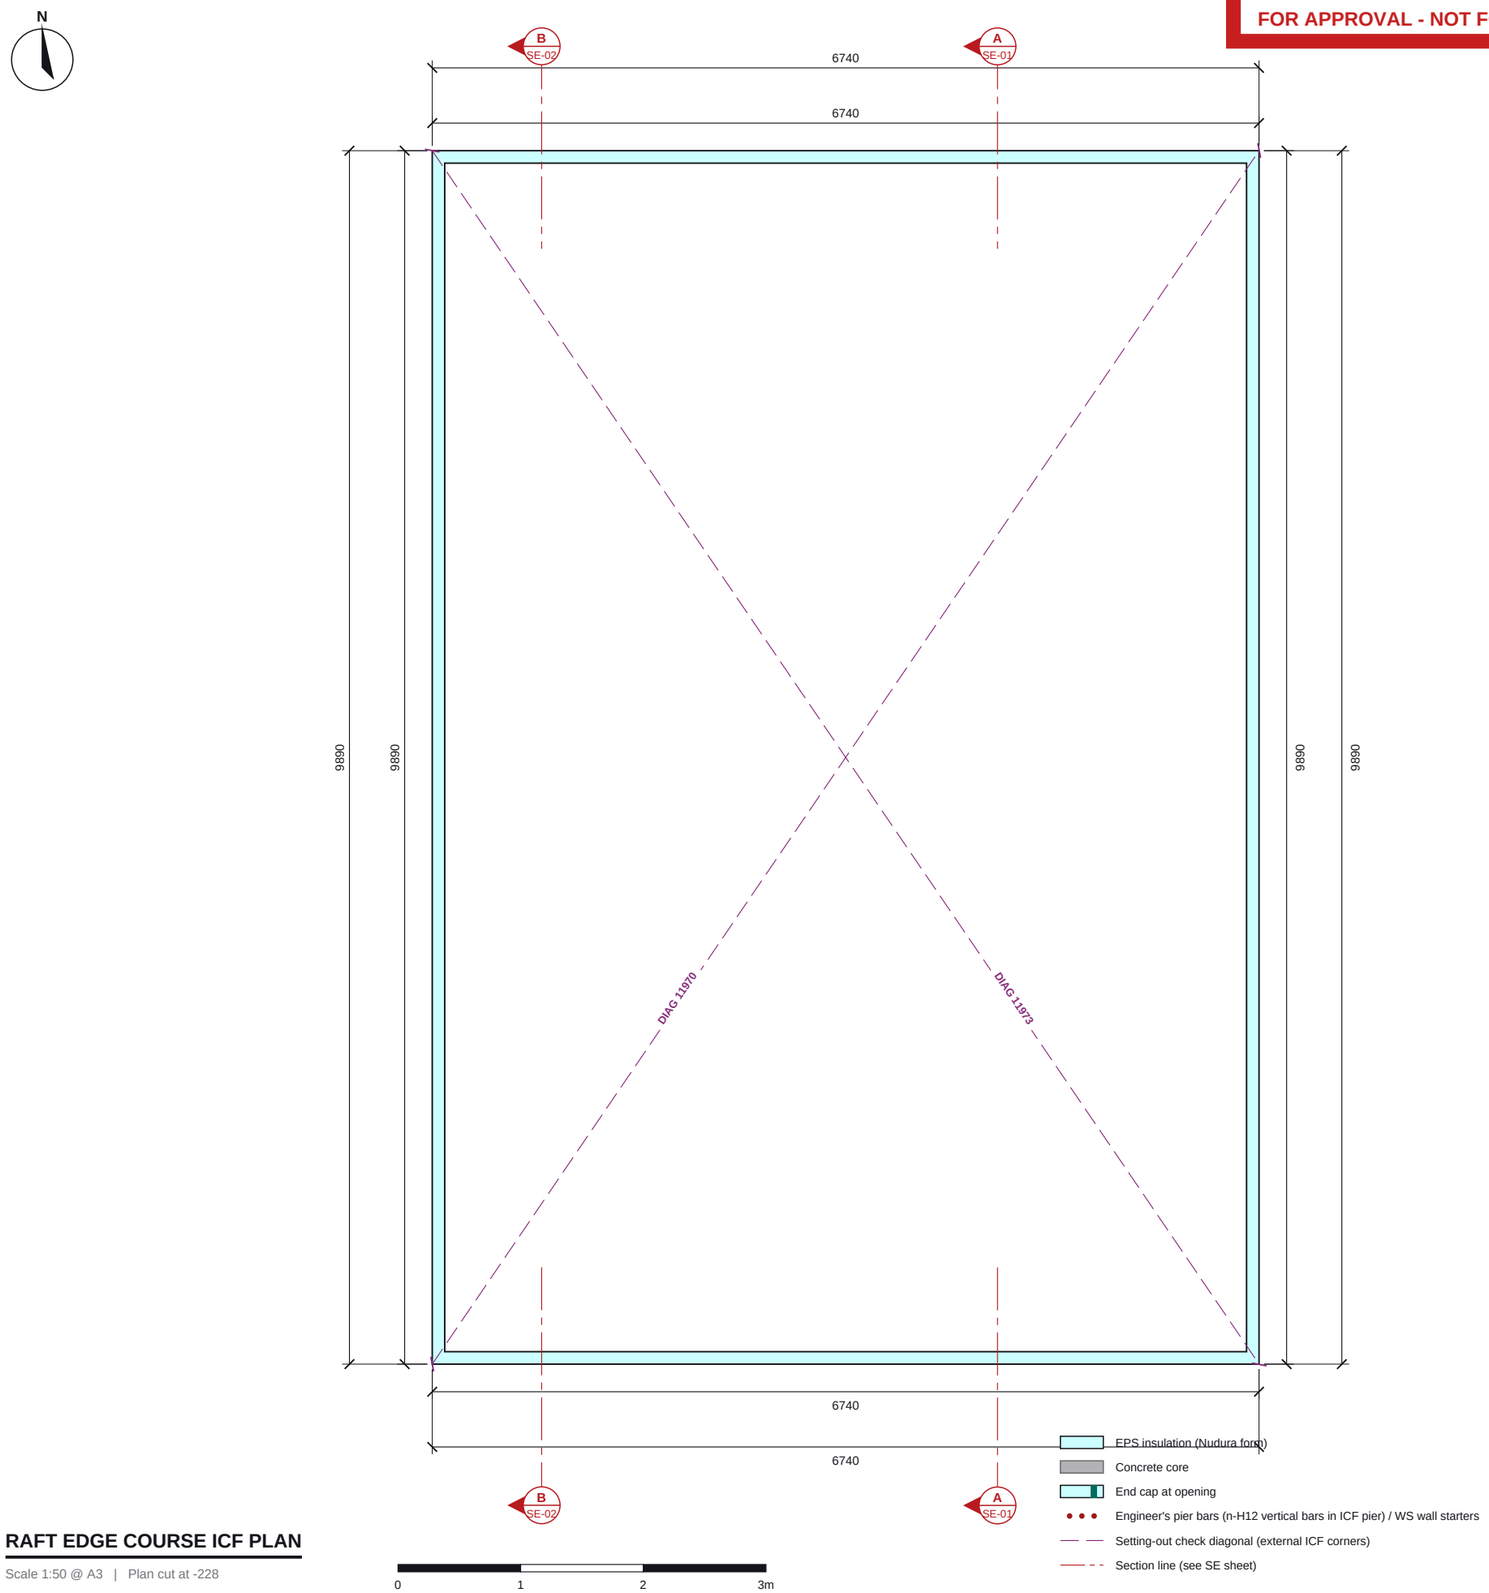


## RAFT EDGE COURSE ICF PLAN

Scale 1:50 @ A3 | Plan cut at -228

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

## RAFT EDGE COURSE ICF SCHEDULES

### OPENING SCHEDULE

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| none | | | | | |

Structural openings in the ICF; sill and head above GF FFL.

### NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. Nudura 6in XR35 external walls; no lintels or end caps - heads and jambs closed with 47 x 150 timber closers, the core spans the head (rebar by the engineer).
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Powys (detached), plot 14, building B05. Datum 0 = GF FFL. Architect: Beech Developments - BD0154-POW rev A (JHG 26/10/26).

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| P01 | 29.10.26 | Approval issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| Beech Developments (NW) Ltd | Maes Y Felin, Glan Conwy - Powys |

DRAWING TITLE

**POWYS - RAFT EDGE ICF**

ICF walls, openings, lintels, steel over and engineer's notes

| SCALE | SIZE | DATE |
|---|---|---|
| 1:50 | A3 | 29.10.26 |
| **DRAWN** | **CHECKED** | **APPROVED** |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| FOR APPROVAL | ES26-020-POW-GA-01 | P01 |